

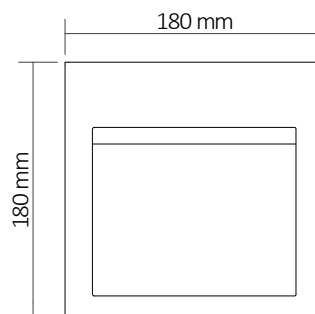


NYE L1001



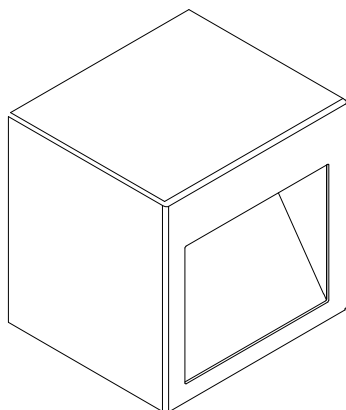

NYE L1001 - VÆGLAMPE

Design: VE2

Lysfordeling

Direkte symmetrisk fremadrettet lys med downlight lyseffekt

Materialer

Varmgalvaniseret stål eller pulverlakeret, varmgalvaniseret stål

Optik

Afskærmning i polycarbonat opalhvid

Lyskildedata

LED type: Philips Fortimo FastFlex Gen4
Operational levetid: Min. 120.000 timer v/Ta maks. 25° C L80B10
Systemforbrug: 11W v/375mA
Farvetemperatur: 3000K, 4000K
Farvegengivelse: CRI >70
Farvenøjagtighed: 4 steps SDCM
Luminous efficacy: 9,5 Lm/W

Driverdata

Driver type: Philips Xitanium
Operational levetid: Min. 50.000 timer
Transientbeskyttelse: 2 kV
Dæmpning: Nej. Kan leveres med DALI-driver mod tillæg

Montering

Vægmonteres

Tilslutning

Tilgang bagud. 2 kabler maks. 5 x 2,5 mm²
5-polet push-in terminal

CE

Klassificering: IP54. IK10. Isolationsklasse I
Vægt 5 kg.